


# PT62

## FLOAT & THERMOSTATIC STEAM TRAPS - DN15, 20, 25

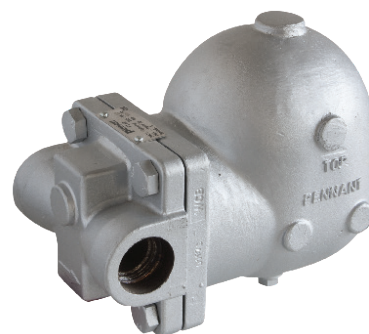

### DESCRIPTION:

PT62 float and thermostatic (internal air vent) steam traps are designed for draining condensate from all types of low and medium pressure steam heating and process equipment. Typical applications include unit heaters, heat exchangers, driers and jacketed vessels. Horizontal installation.

### AVAILABLE TYPES:

PT62 - with thermostatic air vent  
PT62S - SLR (with steam lock release)  
PT62C - with thermostatic air vent and SLR

### FEATURES:

Modulating discharge.  
Discharges condensate at steam temperature.  
Excellent air venting (by thermostatic air vent).

**USE:** Saturated and superheated steam.

### SIZES:

DN15, 20, 25

**CONNECTIONS:** Screwed (NPT, BSPT, BSP)  
Flanged\*/ Socket Weld

\*End connection flanges of ASTM A105 forged carbon steel are welded on.

**Non IBR/IBR approved**

### LIMITING CONDITIONS:

PMA: Max. allowable pressure	16 bar(g)
TMA: Max. allowable temperature	220 °C
PMO: Max.. operating pressure	14 bar(g)
TMO: Max. operating temperature	220 °C
Body shell design rating	20 bar(g) 425° C
Cold hydro test pressure	24 bar(g)

### INSTALLATION:

Horizontal installation with flow from left to right. The trap should be installed horizontally below the drain point of the equipment in a position such that the float arm is in a horizontal plane and the float rises and falls vertically, with the flow direction as indicated on the cover.

The word 'TOP' on the nameplate indicates the top side of the trap.

Max. differential pressure range:

PT62-4.5 : 4.5 bar  
PT62-10 : 10 bar  
PT62-14 : 14 bar

### TRAP DISCHARGE CAPACITY IN kg/hr

MODEL	SIZE	DIFFERENTIAL PRESSURE (bar)																
		0.5	1.0	1.5	2.0	3.0	4.0	4.5	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
PT62-4.5	DN15,20	200	280	321	350	400	454	495	---	---	---	---	---	---	---	---	---	---
PT62-4.5	DN25	840	945	1049	1155	1358	1569	1673	---	---	---	---	---	---	---	---	---	---
PT62-10	DN15,20	135	150	166	180	210	241	255	280	300	350	391	405	420	---	---	---	---
PT62-10	DN25	604	654	710	760	870	974	1024	1079	1185	1290	1394	1499	1603	---	---	---	---
PT62-14	DN15,20	125	140	150	165	190	221	230	246	271	296	325	350	375	405	430	454	482
PT62-14	DN25	425	454	480	510	565	620	645	675	730	785	839	895	949	1004	1064	1120	1174

Recommended safety factor: steady condition 1.5 - 2; fluctuating condition 2-3

## MATERIAL:

NO.	PART	MATERIAL	QTY. (Nos.)
1.	BODY	ASTM A216 Gr. WCB	01
2.	COVER	ASTM A216 Gr. WCB	01
3.	GASKET	GRAPHITE WITH SS REINFORCEMENT	01
4.	VALVE SEAT	AISI 410/420	01
5.	BALL FLOAT & LEVER ASSY.	AISI 304	01
6.	AIR VENT	STAINLESS STEEL	01
7.	BOLT	ASTM A193 Gr. B7	04
8.	DRAIN PLUG	CARBON STEEL	01
9.	BRACKET ASSY.	AISI 304	01
10.	GASKET	COPPER	01
11.	SLR UNIT*	AISI 304	01

## DIMENSIONS: Nominal in mm

SIZE	A	B	C	D	E	Weights (kg)	
						#150, PN16, PN40	#300
DN15	100	140	104	52	165	5.4	5.9
DN20	100	140	104	52	165	5.8	6.5
DN25	120	188	165	105	215	11.5	12.5

SIZE	F		
	WNRF #150	WNRF #300	INT. FLANGE (#150, 300, PN16 & PN40)
DN15	167	185	150
DN20	177	190	150
DN25	210	220	160

## AVAILABLE SPARES:


Valve Seat, Ball Float & Lever Assly.,  
Airvent Assly., Gaskets

## HOW TO ORDER:


PT62-4.5 DN25 BSP NIBR

## ORDERING INFORMATION:



- 1) Inlet Pressure in bar(g)
- 2) Back Pressure in bar(g)
- 3) Operating Temperature in °C
- 4) Condensate Load in kg/hr
- 5) Size & Model
- 6) End Connections
- 7) IBR/NIBR

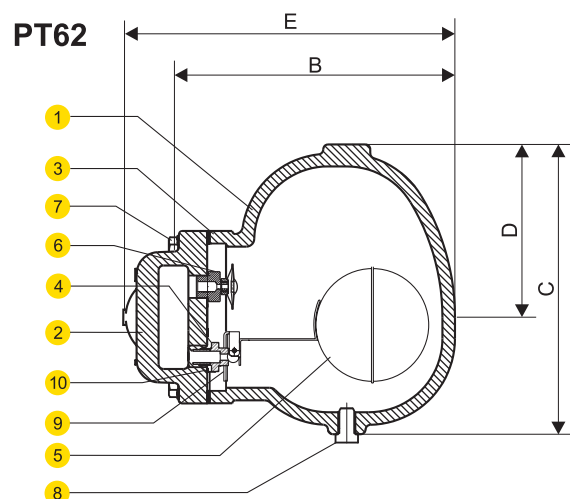


**PT62S** STEAM LOCK  
RELEASE (SLR)

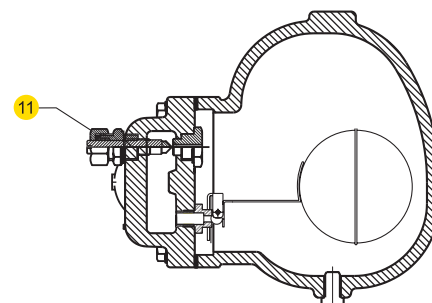

**PT62C** THERMOSTATIC  
AIR VENT + SLR

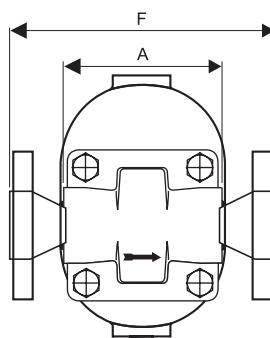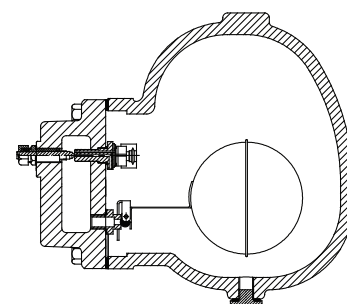

WELD ON FLANGE

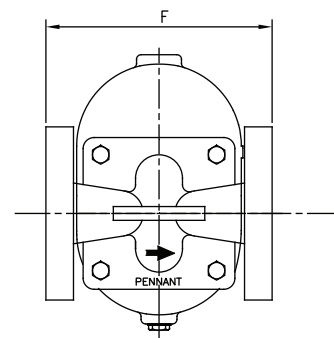


INTEGRAL FLANGE

Local regulations may restrict the use of this product below the conditions quoted. Limiting conditions refer to standard connections only. In the interest of development and improvement of the product, we reserve the right to change the specifications without prior notice.

All Dimensions are in mm. weights in kg.

# PT62

## FLOAT & THERMOSTATIC STEAM TRAPS - DN40, DN50

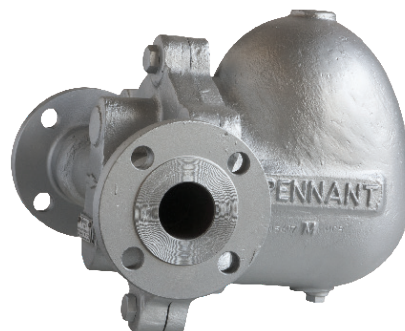

### DESCRIPTION:

PT62 float and thermostatic (internal air vent) steam traps are designed for draining condensate from all types of low and medium pressure steam heating and process equipment. Typical applications include unit heaters, heat exchangers, driers and jacketed vessels. Horizontal installation.

### AVAILABLE TYPES:

PT 62 - with thermostatic air vent  
PT 62S - SLR (with steam lock release)  
PT 62C - with thermostatic air vent and SLR.

### FEATURES:

Modulating discharge.  
Discharges condensate at steam temperature.  
Excellent air venting (by thermostatic air vent).

**USE:** Saturated and superheated steam.

### SIZES:

DN40, 50

**CONNECTIONS:** Screwed (NPT/BSPT/BSP)  
Flanged / Socket Weld

**Non IBR/IBR approved**

### LIMITING CONDITIONS:

PMA: Max. allowable pressure	16 bar(g)
TMA: Max. allowable temperature	220 °C
PMO: Max. operating pressure	14 bar(g)
TMO: Max. operating temperature	220 °C
Body shell design rating	20 bar(g) 425° C
Cold hydro test pressure	24 bar(g)

### INSTALLATION:

Horizontal installation with flow from left to right. The trap should be installed horizontally below the drain point of the equipment in a position such that the float arm is in a horizontal plane and the float rises and falls vertically, with the flow direction as indicated on the cover.

The arrow on the nameplate should be pointing vertically upwards.

Max. differential pressure range:

PT62-4.5 : 4.5 bar

PT62-10 : 10 bar

PT62-14 : 14 bar

### TRAP DISCHARGE CAPACITY IN kg/hr

MODEL	SIZE	DIFFERENTIAL PRESSURE (bar)																
		0.5	1	1.5	2	3	4	4.5	5	6	7	8	9	10	11	12	13	14
PT62-4.5	DN40,50	3022	3272	3521	3787	4295	4795	5056	---	---	---	---	---	---	---	---	---	--
PT62-10	DN40,50	2234	2684	2847	2920	3097	3337	3417	3526	3700	4030	4404	4790	5119	---	---	---	--
PT62-14	DN40,50	1944	2268	2538	2777	2972	3097	3176	3251	3367	3620	3887	4125	4366	4586	4795	4994	5190

Recommended safety factor: steady condition 1.5 - 2; fluctuating condition 2-3

## MATERIAL:

NO.	PART	MATERIAL	QTY. (Nos.)
1.	BODY	ASTM A216 Gr. WCB	01
2.	COVER	ASTM A216 Gr. WCB	01
3.	GASKET	GRAPHITE WITH SS REINFORCEMENT	01
4.	VALVE SEAT	AISI 420/ASTM A743 Gr.CA40	01
5.	BALL FLOAT & LEVER ASSY.	AISI 304	01
6.	AIR VENT	STAINLESS STEEL	01
7.	BOLT	ASTM A193 Gr. B7	06
8.	DRAIN PLUG	CARBON STEEL	01
9.	BRACKET ASSY.	AISI 304	01
10.	SLR UNIT*	AISI 304	01

## WEIGHTS: (approx.)

Screwed/SW	Flanged
31 kg	35 kg

## DIMENSIONS: Nominal in mm

SIZE	DIMS. A (SCR/SW)	DIMS. B (INT.FLGD)			
		#150	#300	PN16	PN40
DN40	252	230	230	230	230
DN50	252	230	230	230	230

## AVAILABLE SPARES:

Valve Seat, Ball Float & Lever Assly.  
Air Vent Assly. Gaskets

## HOW TO ORDER:

PT62-4.5 DN40 BSP NIBR


## ORDERING INFORMATION:

- 1) Inlet Pressure in bar(g)
- 2) Back Pressure in bar(g)
- 3) Operating Temperature in °C
- 4) Condensate Load in kg/hr
- 5) Size & Model
- 6) End Connections
- 7) IBR/NIBR


Local regulations may restrict the use of this product below the conditions quoted. Limiting conditions refer to standard connections only. In the interest of development and improvement of the product, we reserve the right to change the specifications without prior notice.

All Dimensions are in mm. weights in kg.

PT62

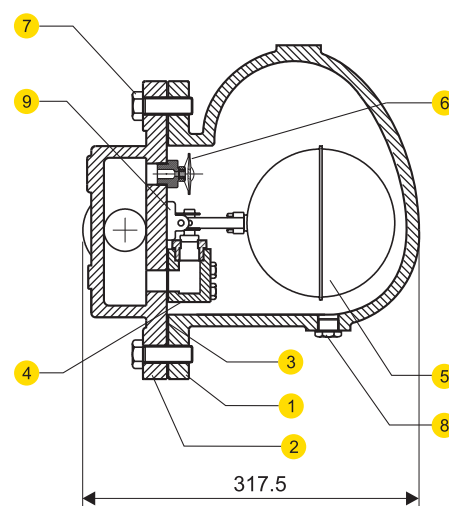

PT62S

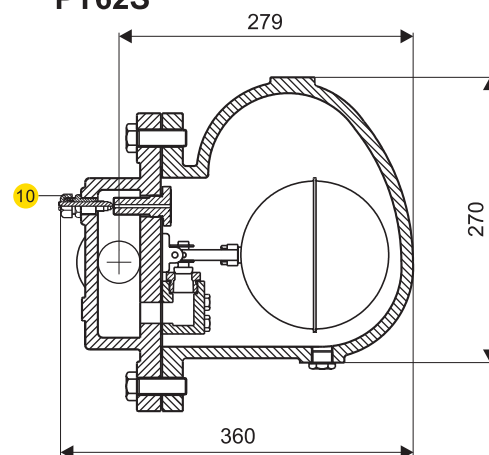

PT62C

